

Industrial Batteries / Network Power

Sonnenschein SOLAR



»Premium quality for
renewable energy«



Industrial Batteries

The powerful range of Network Power

GNB® Industrial Power offers reliable energy storage solutions for critical systems requiring uninterrupted power supply. With a comprehensive product range based on state-of-the-art technologies, GNB delivers the right battery for every application.

The below table is only indicative and depends on the specific customer application. For more information please ask a GNB sales representative.

Applications	Battery ranges																			
	Sonnenschein							Marathon		Sprinter		Absolyte	Powerfit	Classic						
	A400/ A600	A400 FT	A500	A700	SOLAR	RAIL	Power Cycle	M-FT	L/XL	P/XP	XP-FT	GP/GX	S100/ S300	GroE	OCSM	OPzS	Energy Bloc/OGi	Solar	rail	
Telecom 	●	●	●	●			●	●	●		●	●			●	●	●			
UPS 	●	●	●	●			●	●	●	●	●	●			●		●			
Emergency lighting 	●	●	●	●			●	●	●	●	●		●			●	●			
Security 	●		●	●						●	●		●		●	●				
EVU 	●	●		●			●	●				●		●	●	●	●			
Utility 	●	●	●	●		●	●	●	●			●			●		●		●	
Photovoltaic 					●		●					●						●		
Universal 	●	●	●	●			●	●	●	●	●	●	●		●	●	●			

Powerful product brands

ABSOLYTE™

MARATHON™

Sprinter®

Powerfit®

- > VRLA batteries (**V**alve **R**egulated **L**ead **A**cid) in which the electrolyte is fixed in an **A**bsorbent **G**lass **M**at (AGM)
- > Excellent high current capability
- > Very economical
- > Maintenance-free (no topping up)



- > VRLA batteries (**V**alve **R**egulated **L**ead **A**cid) in which the electrolyte is fixed in a gel (dryfit® technology)
- > Inventor of Gel technology
- > Highest reliability, even in non-optimal conditions
- > Particularly suitable for cyclic applications
- > Maintenance-free (no topping up)

Classic®

- > Conventional lead-acid batteries with liquid electrolyte
- > Extreme reliability, proven over decades
- > Low maintenance

Sonnenschein SOLAR

The compact alternative for smaller solar applications

Sonnenschein SOLAR batteries are specially designed for small to medium performance requirements in leisure and consumer applications. The advantages of the maintenance free VRLA-batteries are enhanced by the worldwide excellent reputation and technical image of the dryfit technology.

Your benefits:

- > **Excellent cycling performance** – 800 cycles at 60% Depth of Discharge C_{10} (at 20 °C)
- > **dryfit Gel** – VRLA technology
- > **Lowest energy consumption** – saving costs
- > **Robust design** – resilient in harsh conditions
- > **Proof against deep discharge** – greater long-term energy delivery
- > **Completely recyclable** – low CO₂ footprint



Specifications:

- > Nominal capacity 6.60 – 230 Ah C_{100} (20 °C)
- > Long shelf life up to 17 months at 20 °C without recharge due to the very low self discharge rate
- > Designed in accordance with IEC 61427 and IEC 60896-21/22
- > Manufactured in Europe in our ISO 9001 certified production plants
- > Trouble-free transport of operational blocks, no restrictions for rail, road, sea and air transportation (IATA, DGR, clause A67)
- > Approval: UL (Underwriter Laboratories), DNV GL (Germanischer Lloyd)



Nominal capacity 6.60 – 230 Ah C_{100}



Block battery




Grid plate



Recyclable




Valve regulated lead-acid batteries



Proof against deep discharge



Maintenance-free (no topping up)



800 cycles at 60 % DoD C_{10}

Sonnenschein SOLAR

Technical data

Technical characteristics and data


Type	Part number	Nom. voltage V	Nominal capacity C_{100} 1.80 Vpc 20 °C Ah	Discharge current I_{100} A	Length (l) max. mm	Width (b/w) max. mm	Height up to top of cover (h1) max. mm	Height including connectors (h2) max. mm	Weight* approx. kg	Terminal	Terminal position
S12/6.6 S	NGS01206D6HS0SA	12	6.60	0.06	152	65.5	94.5	98.4	2.60	S-4.8	3
S12/17 G5	NGS0120017HS0BA	12	17.0	0.17	181	76.0	-	167	6.10	G-M5	1
S12/27 G5	NGS0120027HS0BA	12	27.0	0.27	167	176	-	126	9.60	G-M5	1
S12/32 G6	NGS0120032HS0BA	12	32.0	0.32	197	132	160	179	11.1	G-M6	2
S12/41 A	NGS0120041HS0CA	12	41.0	0.41	210	175	-	175	14.2	A-Terminal	1
S12/60 A	NGS0120060HS0CA	12	60.0	0.60	261	136	208	230	18.0	A-Terminal	1
S12/85 A	NGS0120085HS0CA	12	85.0	0.85	353	175	-	190	25.5	A-Terminal	1
S12/90 A	NGS0120090HS0CA	12	90.0	0.90	330	171	213	236	28.2	A-Terminal	2
S12/130 A	NGS0120130HS0CA	12	130	1.30	286	269	208	230	36.7	A-Terminal	4
S12/230 A	NGS0120230HS0CA	12	230	2.30	518	274	216	238	63.5	A-Terminal	3

* Actual weight may differ by $\pm 5\%$


Capacities C_1 - C_{100} (20 °C) in Ah

Type	C_1 1.70 Vpc	C_5 1.70 Vpc	C_{10} 1.70 Vpc	C_{20} 1.75 Vpc	C_{100} 1.80 Vpc
S12/6.6 S	2.90	4.60	5.10	5.70	6.60
S12/17 G5	9.30	12.6	14.3	15.0	17.0
S12/27 G5	15.0	22.1	23.5	24.0	27.0
S12/32 G6	16.9	24.4	27.0	28.0	32.0
S12/41 A	21.0	30.6	34.0	38.0	41.0
S12/60 A	30.0	42.5	47.5	50.0	60.0
S12/85 A	55.0	68.5	74.0	76.0	85.0
S12/90 A	50.5	72.0	78.0	84.0	90.0
S12/130 A	66.0	93.5	104	110	130
S12/230 A	120	170	190	200	230

Drawings with terminal position, terminal and torque

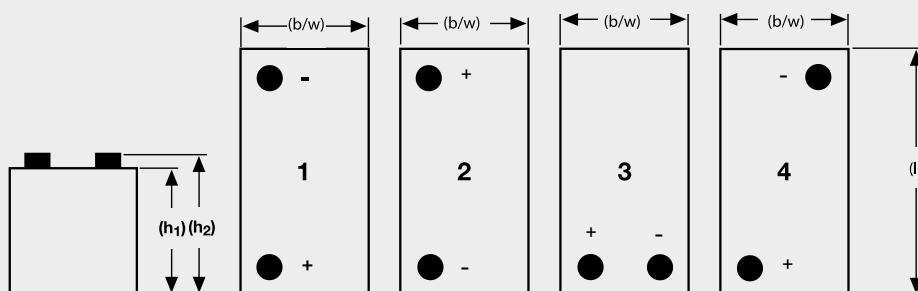

Not to scale!

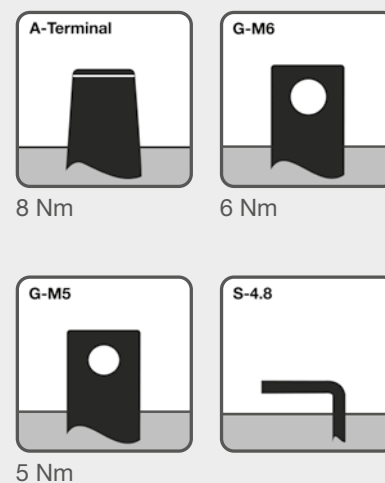

Sonnenschein SOLAR BLOCK

Safe power supply for medium performance

The Sonnenschein SOLAR BLOCK battery range is very powerful and reliable in rough application conditions. This range is the ideal energy source for medium industrial solar systems, holiday and weekend houses, wind powerstations, as well as for other safety equipment power supplies.

Your benefits:

- > **Excellent cycling performance** – 1200 cycles at 60% Depth of Discharge C_{10} (at 20 °C)
- > **dryfit Gel** – VRLA technology
- > **Lowest energy consumption** – saving costs
- > **Robust design** – resilient in harsh conditions
- > **Proof against deep discharge** – greater long-term energy delivery
- > **Completely recyclable** – low CO₂ footprint



Specifications:

- > Nominal capacity 60.0 – 330 Ah C_{100} (20 °C)
- > Long shelf life up to 17 months at 20 °C without recharge due to the very low self discharge rate
- > Designed in accordance with IEC 61427 and IEC 60896-21/22
- > Manufactured in Europe in our ISO 9001 certified production plants
- > Trouble-free transport of operational blocks, no restrictions for rail, road, sea and air transportation (IATA, DGR, clause A67)
- > Approval: UL (Underwriter Laboratories), DNV GL (Germanischer Lloyd)



Nominal capacity 60.0 – 330 Ah C_{100}



Block battery




Grid plate



Recyclable




Valve regulated lead-acid batteries



Proof against deep discharge



Maintenance-free (no topping up)



1200 cycles at 60 % DoD C_{10}

Sonnenschein SOLAR BLOCK

Technical data

Technical characteristics and data


Type	Part number	Nom. voltage V	Nominal capacity C_{100} 1.80 Vpc 20 °C Ah	Discharge current I_{100} A	Length (l) max. mm	Width (b/w) max. mm	Height up to top of cover (h1) max. mm	Height including connectors (h2) max. mm	Weight* approx. kg	Terminal	Terminal position
SB 6/200 A	NGSB060200HS0CA	6	200	2.00	246	192	254	275	28.0	A-Terminal	4
SB 6/330 A	NGSB060330HS0CA	6	330	3.30	312	182	337	359	46.5	A-Terminal	4
SB12/60 A	NGSB120060HS0CA	12	60.0	0.60	278	175	-	190	18.0	A-Terminal	1
SB12/75 A	NGSB120075HS0CA	12	75.0	0.75	330	171	214	236	27.7	A-Terminal	2
SB12/100 A	NGSB120100HS0CA	12	100	1.00	513	189	195	219	36.0	A-Terminal	3
SB12/130 A	NGSB120130HS0CA	12	130	1.30	513	223	195	219	44.5	A-Terminal	3
SB12/185 A	NGSB120185HS0CA	12	185	1.85	518	274	216	238	60.5	A-Terminal	3

* Actual weight may differ by $\pm 5\%$


Capacities C_1 - C_{100} (20 °C) in Ah

Type	C_1 1.70 Vpc	C_5 1.70 Vpc	C_{10} 1.70 Vpc	C_{20} 1.75 Vpc	C_{100} 1.80 Vpc
SB 6/200 A	104	153	162	180	200
SB 6/330 A	150	235	260	280	330
SB12/60 A	34.0	45.0	52.0	56.0	60.0
SB12/75 A	48.0	60.0	66.0	70.0	75.0
SB12/100 A	57.0	84.0	89.0	90.0	100
SB12/130 A	78.0	101	105	116	130
SB12/185 A	103	150	155	165	185

Drawings with terminal position, terminal and torque

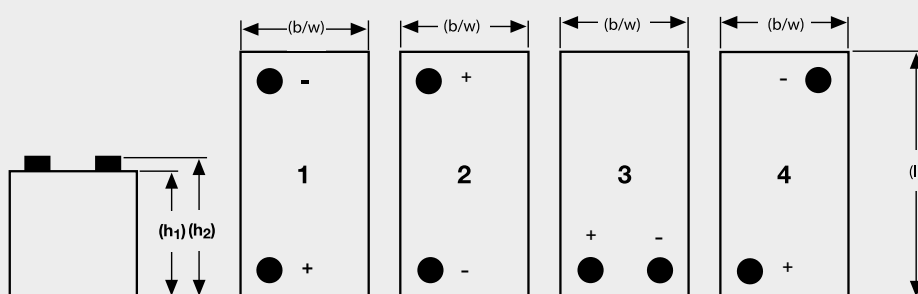

Not to scale!



8 Nm

Sonnenschein A600 SOLAR

Unmatched dryfit Gel technology for renewable energy storage

Sonnenschein A600 SOLAR is a premium range, developed specifically for applications where cycling is required. It has extraordinary energy-saving features in addition to robust reliability, proven for decades in many installations worldwide.


Your benefits:

- > **Exceptional cycling performance** – 3000+ cycles* at 60 % Depth of Discharge C_{10}
- > **dryfit Gel** – VRLA technology
- > **Lowest energy consumption** – saving costs
- > **Strong tubular plate technology** – for longer life in the toughest conditions
- > **Proof against deep discharge** – greater long-term energy delivery
- > **Horizontal mounting possible** – easy installation and maintenance
- > **Completely recyclable** – low CO₂ footprint



Specifications:


- > Nominal capacity 294 – 3919 Ah C_{120} (20°C)
- > Cycling performance at 20 °C (with IU charging): 2400 cycles at 60 % Depth of Discharge (C_{10}) at 20 °C
For enhanced performance and for systems ≥ 48 V we recommend IU charging, to reach 3000+ cycles at 20 °C
- > Designed in accordance with IEC 61427 and IEC 60896-21/22
- > Long shelf life up to 17 months at 20 °C without recharge due to the very low self discharge rate
- > Also available as flame-retardant version on request (V0)
- > Manufactured in Europe in our ISO 9001 certified production plants
- > Trouble-free transport of operational cells, no restrictions for rail, road, sea and air transportation (IATA, DGR, clause A67)
- > Approval: UL (Underwriter Laboratories), DNV GL (Germanischer Lloyd)



Nominal capacity 294 – 3919 Ah C_{120}



Single cell




Tubular plate



Recyclable




Valve regulated lead-acid batteries



Proof against deep discharge



Maintenance free (no topping up)



3000+ cycles* at 60 % DoD C_{10}

*With IU charging, at 20 °C

Sonnenschein A600 SOLAR

Technical data

Technical characteristics and data

Type	Part number	Nom. voltage V	Nominal capacity C_{120} 1.85 Vpc 20 °C Ah	Discharge current I_{120} A	Length (l) max. mm	Width (b/w) max. mm	Height up to top of cover (h1) max. mm	Height incl. connectors (h2) max. mm	Weight* approx.kg	Terminal	Pole pairs
A602/295 Solar	NGS6020295HS0FC	2	294	2.45	105	208	357	399	17.4	F-M8	1
A602/370 Solar	NGS6020370HS0FC	2	367	3.05	126	208	357	399	22.0	F-M8	1
A602/440 Solar	NGS6020440HS0FC	2	440	3.66	147	208	357	399	25.0	F-M8	1
A602/520 Solar	NGS6020520HS0FC	2	519	4.32	126	208	473	515	30.0	F-M8	1
A602/625 Solar	NGS6020625HS0FC	2	623	5.19	147	208	473	515	35.0	F-M8	1
A602/750 Solar	NGS6020750HS0FC	2	727	6.05	168	208	473	515	39.0	F-M8	1
A602/850 Solar	NGS6020850HS0FC	2	845	7.06	147	208	648	690	49.0	F-M8	1
A602/1130 Solar	NGS6021130HS0FC	2	1126	9.42	212	193	648	690	66.0	F-M8	2
A602/1415 Solar	NGS6021415HS0FC	2	1408	11.7	212	235	648	690	80.0	F-M8	2
A602/1695 Solar	NGS6021695HS0FC	2	1689	14.1	212	277	648	690	95.0	F-M8	2
A602/1960C Solar	NGS6021960HS0FC	2	1994	16.3	212	277	717	759	106	F-M8	2
A602/2600 Solar	NGS6022600HS0FC	2	2613	21.7	216	400	775	816	149	F-M8	3
A602/3270 Solar	NGS6023270HS0FC	2	3266	27.2	214	489	774	816	190	F-M8	4
A602/3920 Solar	NGS6023920HS0FC	2	3919	32.6	214	578	774	816	238	F-M8	4


* Actual weight may differ by ±5%

Capacities C_1 - C_{120} (20 °C) in Ah

Type	C_1 1.67 Vpc	C_3 1.75 Vpc	C_5 1.77 Vpc	C_{10} 1.80 Vpc	C_{24} 1.80 Vpc	C_{48} 1.80 Vpc	C_{72} 1.80 Vpc	C_{100} 1.85 Vpc	C_{120} 1.85 Vpc
A602/295 Solar	124	167	193	217	248	273	289	285	294
A602/370 Solar	155	209	241	272	310	342	362	357	367
A602/440 Solar	186	251	289	326	372	410	434	428	440
A602/520 Solar	229	307	342	379	435	471	503	505	519
A602/625 Solar	275	369	410	455	523	565	604	606	623
A602/750 Solar	321	431	479	531	610	659	705	707	727
A602/850 Solar	368	520	614	681	729	782	827	822	845
A602/1130 Solar	491	694	818	908	973	1043	1102	1096	1126
A602/1415 Solar	614	867	1023	1135	1216	1304	1378	1370	1408
A602/1695 Solar	737	1041	1228	1362	1459	1565	1654	1644	1689
A602/1960C Solar	867	1222	1371	1593	1803	1942	2016	1957	1994
A602/2600 Solar	1047	1548	1782	2024	2276	2472	2599	2547	2613
A602/3270 Solar	1309	1935	2227	2530	2846	3090	3249	3184	3266
A602/3920 Solar	1571	2322	2673	3036	3415	3708	3899	3821	3919

Sonnenschein A600 SOLAR

Drawings with terminal position, terminal and torque

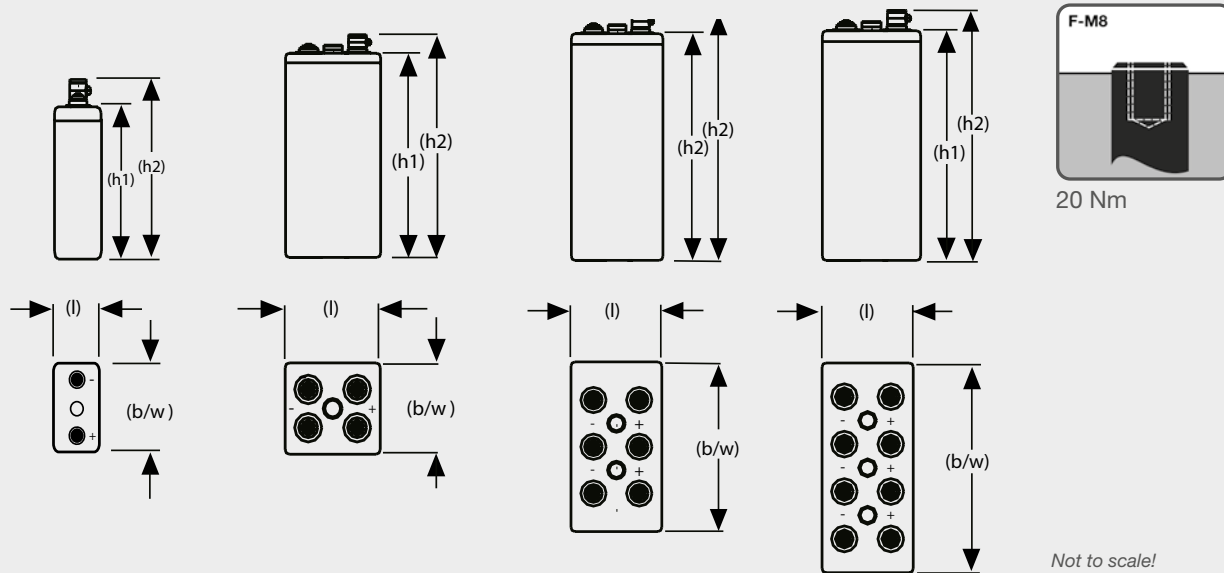

Battery Service – Energy Solutions

Keeping your business on the move

GNB® is the Expert

Who could do this job better than the professionals of a company with more than 100 years of experience in battery development, production and application ?


Leave the responsibility for the maintenance of your batteries and chargers to the professionals: a GNB service contract provides you with exceptional economic advantages through time savings, cost savings and safety!



Installation of Batteries and Systems for Network Power



- > Development of complete turnkey solutions from the design concept to installation and commissioning.
- > Installation according to legal and safety regulations including CE certification by approved installation technicians.
- > Training and certification of external installation technicians according to CE regulations.

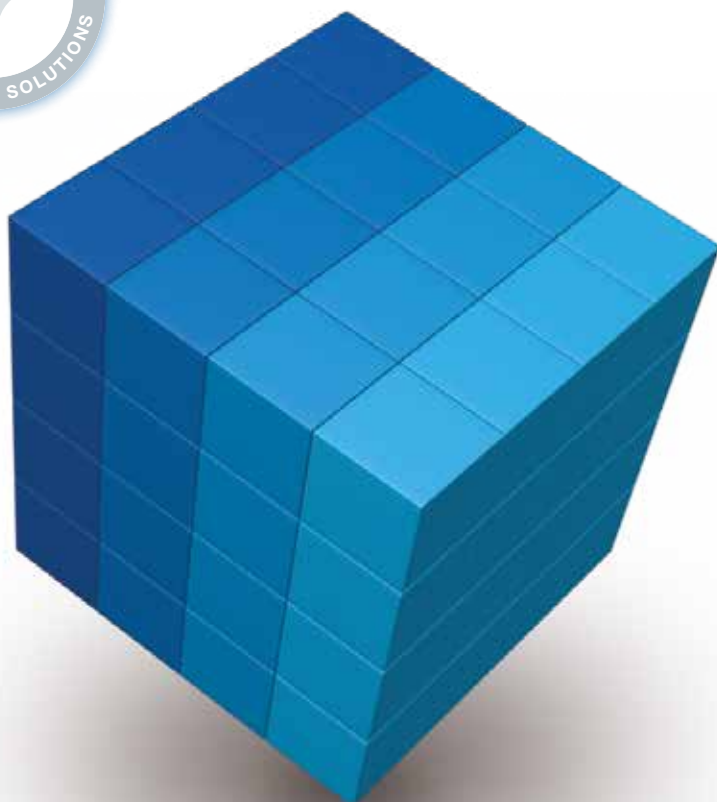

- ✦ **Inspection Contract**
- ✦ **Maintenance Contract**
- ✦ **Lifetime Warranty Contract**
- ✦ **Full Service Contract**



**»GNB Service –
individualized, professional
and all over Europe!«**

Notes

GNB Industrial Power – A division of Exide Technologies – offers an extensive range of storage products and services, including solutions for telecommunication systems, railway applications, mining, photovoltaic (solar energy), uninterrupted power supply (UPS), electrical power generation and distribution, fork lifts and electric vehicles.

Exide Technologies takes pride in its commitment to a better environment. An integrated approach to manufacturing, distributing and recycling of lead-acid batteries has been developed to ensure a safe and responsible life cycle for all of its products.

NXSSOTEPDF00220 Subjects to alterations