




## DIESEL 4000 E XL C5

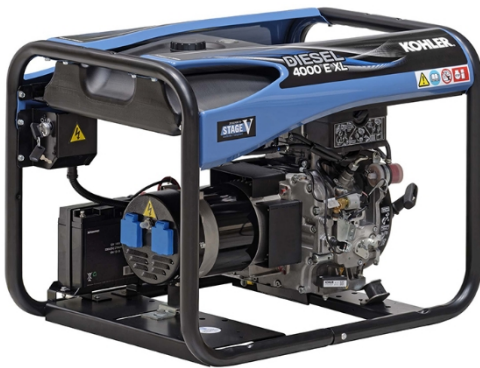

### DIESEL 4000 E XL C5

PORTABLE POWER

GENERATING SET Range DIESEL

#### PRODUCT ADVANTAGES

Generating set guaranteed 3 years  
 KOHLER air-cooled industrial engine  
 Large Autonomy  
 Comfort of prehension thanks to the ergonomic handles  
 Electric starter with batteries without maintenance

GENERATOR SMART CARE is a Bluetooth box which can be used on all the brand's portable generators.

TECHNOLOGY EQUIPPED WITH AN INNOVATIVE APPLICATION Generator Smart Care is a digital solution which provides access to:

- The list of generators
- The maintenance due dates
- A maintenance aid
- The map of reseller partners

STAGE V (2016/1628 EU) : This product is compliant with regulation for implementing requirements relating to gaseous and pollutant emission limits in Europe

#### Range DIESEL

Both long run times and very long life for professional applications.

#### GENERAL SPECIFICATIONS

Range	DIESEL
Frequency (Hz)	50 Hz
Max power (kW)	3,4
Nominal voltage (V)	230
Number of Phase	Single phase
Fuel	Diesel Fuel
Tank (L)	16
75% cons. (l/h)	0,9
75% Autonomy (h)	17,8
Sound power level guaranteed LwA dB(A)	108
Acoustic pressure level @1m in dB(A)	92
Acoustic pressure level @7m in dB(A)	78

#### ENGINE SPECIFICATIONS

Engine brand	KOHLER
Engine ref.	KD350E_C5
Engine Type	Diesel O.H.V.
Start	Electrical
Oil shutdown	Oui
Displacement (cm3)	349
Oil system capacity including filters (l)	1,2

#### ALTERNATOR SPECIFICATION

Technology	Brushless
AVR Regulation	No
Indication of protection	IP 23
Insulation class	H

#### PLUGS AND PANEL DESCRIPTIVE

2 230V 10/16A sockets - circuit breaker

#### DIMENSIONS AND WEIGHT

Length (cm)	81
Width (cm)	55,5
Height (cm)	59
Dry Weight (kg)	84

#### PACKAGING

Packaging type	Box
Length (cm)	82
Width (cm)	56,5
Height (cm)	60
Weight (kg)	87
Pallet type	120/80
Number of box by pallet	6
Pallet height (cm)	193
weight of the packaged Pallet (kg)	532







## DIESEL 4000 E XL C5

### ACCESSORIES SUPPLIED

User and maintenance manual  
Floor maintaining slot  
Ergonomic handle grip

### OPTIONS

- R01** This set includes the hour meter and the differential circuit breaker
- R05M** R05M - Manual source inverter for connecting a single-phase generator to a house
- 3499231001745** RKDS1 - Maintenance kit for DIESEL 4000 including oil filter, fuel filter and air filter
- RH1** RH1 - Protective cover for HX 4000 – 6000 – 7500T / HXC 4000 – 6000 – 7500T / PERFORM 4500 – 4500 XL – 5500T – 5500 T XL – 6500 – 6500 XL – 7500 T – 7500 XL / TECHNIC 6500 – 7500 TE / DIESEL / TRASH ; Dimensions : 82 x 58 x 50 cm
- RPM** RPM - Plug kit for all models: 2 x 16A /230V sockets, 1 x CEE17 16A/230V socket, 1 x 32A/230V socket, 1 x 16A/400V socket
- RPQ** RPQ - 1m earth spike, supplied with 2m 10mm<sup>2</sup> mains cable
- RKD1** RKD1 - Kit of 2 removable differential adaptors for domestic sockets 16A